


A2

Single Spring, Elastomer Bellows Seal



d(in)	D	L	D1	L2
0.625	1.312	0.875	1.250	0.406
0.750	1.437	0.875	1.375	0.406
0.875	1.562	0.937	1.500	0.406
1.000	1.812	1.000	1.625	0.437
1.125	1.875	1.062	1.750	0.437
1.250	2.062	1.062	1.875	0.437
1.375	2.250	1.125	2.000	0.437
1.500	2.375	1.125	2.125	0.437
1.625	2.718	1.375	2.375	0.500
1.750	2.750	1.375	2.500	0.500
1.875	2.875	1.500	2.625	0.500
2.000	3.000	1.500	2.750	0.500
2.125	3.250	1.687	3.000	0.562
2.250	3.375	1.687	3.125	0.562
2.375	3.500	1.812	3.250	0.562
2.500	3.625	1.812	3.375	0.562
2.625	3.875	1.937	3.375	0.625
2.750	4.000	1.937	3.500	0.625
2.875	4.125	2.062	3.750	0.625
3.000	4.250	2.062	3.875	0.625
3.125	4.562	2.187	4.000	0.781
3.250	4.687	2.187	4.125	0.781
3.375	4.812	2.187	4.250	0.781
3.500	4.937	2.187	4.375	0.781
3.625	5.125	2.312	4.500	0.781
3.750	5.250	2.312	4.625	0.781
3.875	5.437	2.312	4.750	0.781
4.000	5.562	2.312	4.875	0.781

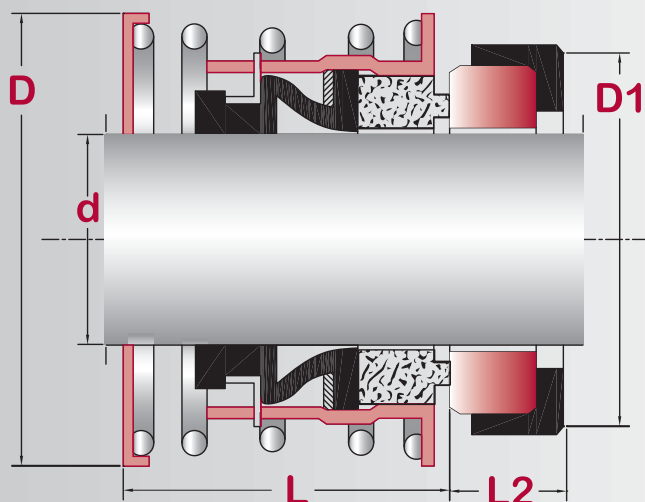

Features and Benefits:

- Designed for shorter operating lengths than A1
- Bellows design helps compensate for face wear
- Bi-directional
- Torque of pump shaft drives through drive band and notches
- Rugged single spring
- Multiple face and elastomer choices



Standard Materials of Construction:

• Faces:

- Carbon Graphite (Resin Impregnated), Antimony-Impregnated Carbon, Silicon Carbide, Tungsten Carbide

• Elastomers:

- Buna, Viton®, Aflas®, Neoprene, EPDM

• Metallurgy:

- 304, 316, Monel



Operating Limits:

- Pressure: to 150 PSI.
- Temperature: -40°F to +400°F.

All industry standard "PS" numbers are available,

Just provide us the "PS" number required or one used on previous orders

Apex
sealing, inc.

Apex Sealing Inc.
164 B Yankee Park Rd.
Fairfax, VT 05454
888 .730 .2739
apexsealing.com