


A210

Single Spring, Elastomer Bellows Seal



INCHES					METRIC							
d	D	D1	L1	L4	d	D	D1	L1	L2	L3	L4	
0.375	0.787	0.870	0.591	0.284	10	20	21	15	27.5	35	5	
0.500	0.945	1.000	0.591	0.312	12	22	23	15	26.5	34	6	
0.625	1.024	1.250	0.591	0.406	14	24	25	15	29	34	6	
0.750	1.260	1.375	0.787	0.406	15	25	26	15	29	34	6	
0.875	1.417	1.500	0.787	0.406	16	26	27	15	29	34	6	
1.000	1.535	1.625	0.787	0.437	18	32	33	20	31.5	39	6	
1.125	1.654	1.750	1.024	0.437	20	34	35	20	31.5	39	6	
1.250	1.811	1.875	1.024	0.437	22	36	37	20	31.5	39	6	
1.375	1.929	2.000	1.024	0.437	24	38	39	20	34	44	6	
1.500	2.126	2.125	1.181	0.437	25	39	40	20	34	44	6	
1.625	2.205	2.375	1.181	0.500	28	42	43	26	36.5	44	6	
1.750	2.402	2.500	1.181	0.500	30	44	45	26	35.5	43	7	
1.875	2.520	2.625	1.181	0.500	32	46	48	26	35.5	48	7	
2.000	2.598	2.750	1.181	0.500	33	47	48	26	35.5	48	7	
2.125	2.717	3.000	1.181	0.562	35	49	50	26	34.5	47	8	
2.250	3.031	3.125	1.299	0.562	38	54	56	30	37	47	8	
2.375	3.150	3.250	1.299	0.562	40	56	58	30	37	47	8	
2.500	3.268	3.375	1.299	0.562	43	59	61	30	37	52	8	
2.625	3.465	3.375	1.299	0.625	45	61	63	30	37	52	8	
2.750	3.504	3.500	1.299	0.625	48	64	66	30	35	50	10	
2.875	3.780	3.750	1.299	0.625	50	66	70	30	37.5	50	10	
3.000	3.898	3.875	1.575	0.625	53	69	73	30	37.5	60	10	
					55	71	75	30	37.5	60	10	
					58	78	78	33	42.5	60	10	
					60	80	80	33	40.5	58	12	
					63	83	83	33	40.5	58	12	
					65	85	85	33	40.5	68	12	
					68	88	90	33	40.5	68	12	
					70	90	92	33	48	68	12	
					75	99	97	40	48	68	12	
					80	104	105	40	47.5	77.5	14	
					85	109	110	40	47.5	77.5	14	
					90	114	115	40	52.5	77.5	14	
					95	119	120	40	52.5	77.5	14	
					100	124	125	40	52.5	77.5	14	

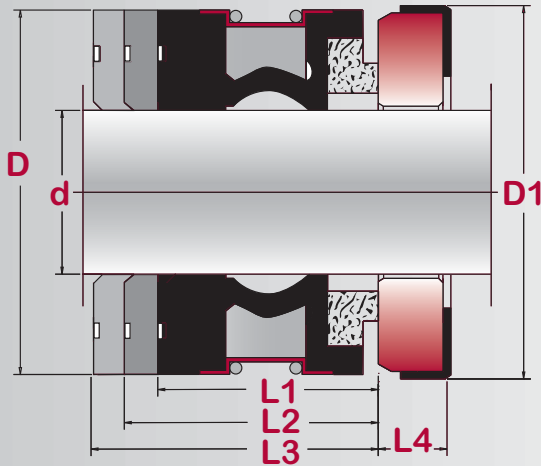

Features and Benefits:

- Full Convolution Bellows design helps compensate for face wear
- Bi-directional
- Interlocking drive band design allows for positive drive
- Design fits DIN24960.
- Interference fit of seal face minimizes effects of face stick
- Equivalent to John Crane® Type 2100, US Seal® Type G

Standard Materials of Construction:

Faces:

- Carbon Graphite (Resin Impregnated), Antimony-Impregnated Carbon, Silicon Carbide, Tungsten Carbide

Elastomers:

- Buna, Viton®, Aflas®, Neoprene, EPDM

Metallurgy:

- 304, 316, Monel

Operating Limits:

- Pressure: 150 PSI.
- Temperature: 20°F to +300°F

All industry standard "PS" numbers are available, Just provide us with the "PS" number required or one used on previous orders

Apex
sealing, inc.

Apex Sealing Inc.
164 B Yankee Park Rd.
Fairfax, VT 05454
888 .730 .2739
apexsealing.com