


ACX

Single Multiple Spring Outside Seal

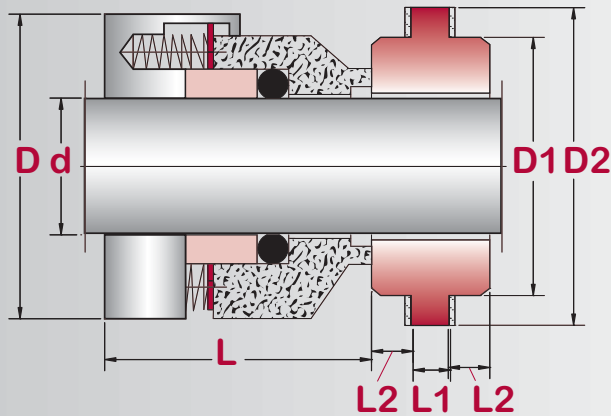

d IN	d MM	D	L	D1	D2	L1	L2
0.750	18	1.732	1.500	1.433	1.850	0.315	0.189
	20	1.811	1.500	1.559	1.969	0.315	0.189
0.875	22	1.890	1.500	1.559	1.969	0.315	0.189
	24	1.969	1.500	1.681	2.087	0.315	0.189
1.000	25	2.047	1.500	1.681	2.087	0.315	0.189
1.125	28	2.165	1.500	1.996	2.480	0.433	0.315
	30	2.283	1.500	2.122	2.598	0.433	0.315
1.250	32	2.362	1.500	2.122	2.598	0.433	0.315
	33	2.362	1.500	2.122	2.598	0.433	0.315
1.375	35	2.441	1.500	2.244	2.717	0.433	0.315
1.500	38	2.559	1.500	2.496	2.992	0.433	0.315
1.625	40	2.677	1.500	2.496	2.992	0.433	0.315
	43	2.756	1.500	2.744	3.228	0.433	0.315
1.750	45	2.835	1.654	2.744	3.228	0.433	0.315
1.875	48	2.953	1.654	3.122	3.740	0.563	0.374
2.000	50	3.071	1.654	3.122	3.740	0.563	0.374
2.125	53	3.150	1.654	3.122	3.740	0.563	0.374
2.250	55	3.150	1.654	3.370	3.976	0.563	0.374
2.375	60	3.386	1.654	3.496	4.173	0.563	0.374
2.500	63	3.543	1.654	3.618	4.252	0.563	0.374
2.625	65	3.661	1.654	3.744	4.370	0.563	0.374
2.750	70	3.661	1.654	3.744	4.370	0.563	0.374
3.000	75	4.134	1.654	4.059	4.685	0.563	0.374

Note: Alternative seats available
- see page 47



Features and Benefits:

- Outside seal design for extreme corrosive applications
- Only inert materials exposed to the product
- All metal parts out of the fluid
- Clamp style drive – no set screws (for non metallic shafts)
- Hastelloy C Springs standard
- Multiple face and elastomer choices
- Many clamp style seats available
- Easy installation



Standard Materials of Construction:

• Faces:

- Carbon Graphite (Resin Impregnated), Silicon Carbide,

• Elastomers:

- Buna, Viton®, Aflas®, Neoprene, EPDM, Kalrez®, Chemraz®

• Metallurgy:

- 304, 316, Monel, Hastelloy C®, Alloy 20



Operating Limits:

- Pressure: to 150 PSI.
- Temperature: -40°F to +400°F.

Apex
sealing, inc.

Apex Sealing Inc.
164 B Yankee Park Rd.
Fairfax, VT 05454
888 .730 .2739
apexsealing.com