


ES502

Single Spring Rubber Bellows



d	D	D1	L	L1
14	24	25	23	12
16	26	27	23	12
18	32	33	24	13.5
20	34	35	24	13.5
22	36	37	24	13.5
24	38	39	26.7	13.5
25	39	40	27	13
28	42	43	30	12.5
30	44	45	30.5	12
32	46	48	30.5	12
33	47	48	30.5	12
35	49	50	30.5	12
38	54	56	32	13
40	56	58	32	13
43	59	61	32	13
45	61	63	32	13
48	64	66	32	13
50	66	70	34	13.5
53	69	73	34	13.5
55	71	75	34	13.5
58	78	78	39	13.5
60	80	80	39	13.5
63	83	83	39	13.5
65	85	85	39	13.5
68	88	90	39	13.5
70	90	92	45.5	14.5
75	95	97	45.5	14.5
80	104	105	45	15
85	109	110	45	15
90	110	115	50	15
95	119	120	50	15
100	124	125	50	15

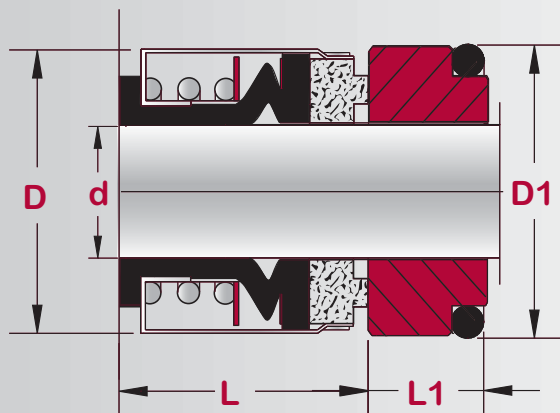

Features and Benefits:

- Common European component
- Compact unitized design
- Rubber bellows drive seal
- Easy installation
- Solids don't clog seal
- Compensates well for run out and shaft thrust
- Conforms to DIN 24960

Standard Materials of Construction:

• Faces:

- Carbon Graphite (Resin Impregnated), Antimony-Impregnated Carbon, Silicon Carbide, Tungsten Carbide

• Elastomers:

- Buna, Viton®, Aflas®, Neoprene, EPDM

• Metallurgy:

- 304, 316

Operating Limits:

- Pressure: 40 Bar, 580 psi
- Temperature: -40°C to 205°C / -40°F to 400°F (depending on materials used).

Apex
sealing, inc.

Apex Sealing Inc.
164 B Yankee Park Rd.
Fairfax, VT 05454
888 .730 .2739
apexsealing.com