


ESAR

Single Unbalanced Component Seal



d	D	D1	L	L1
8a	20	26.0	11	4
8b	20	22.0	11	4
8c	24	26.0	11	8
9	24	26.0	11	8
10	24	26.0	11	8
11	24	26.0	11	8
12a	24	26.0	13	5.5
12b	24	26.0	13	8
12c	32	35.0	13	8
13	24	26.0	13	8
14a	28	25.0	13	7
14b	28	28.5	13	8
14c	32	29.5	13	8
14d	32	35.0	13	8
15a	32	29.5	13	8
15b	32	38.0	13	8
15c	35	38.0	13	8
16a	32	29.5	13	8
16b	35	38.0	13	8
16c	39	38.0	13	8
16d	39	42.0	13	8
17	39	42.0	13	8
18	39	42.0	13	8
19	39	42.0	13	8
20a	39	42.0	13	8
20b	42	45.0	13	10
22	42	45.0	13	10
23	47	50.0	14	10
24	47	50.0	14	10
25a	42	50.0	14	10
25b	47	50.0	14	10
26	47	50.0	14	10
28	54	57.0	15	10
30	54	57.0	15	10
32	54	57.0	15	10
35	60	63.0	16	10
38	65	68.0	18	12
40	65	68.0	18	12
45	70	73.0	20	12
50	85	88.0	23	15
55	85	88.0	23	15
60	105	110.0	30	15
70	105	110.0	32	15

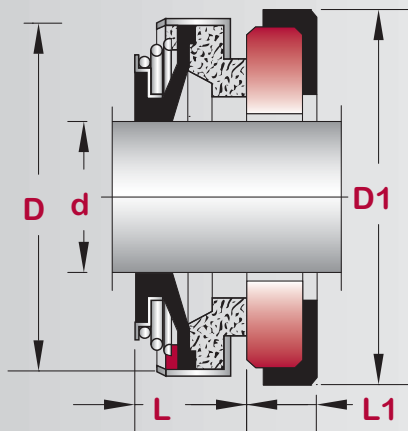

Features and Benefits:

- Compact rubber bellows design
- Bi – Directional
- Short axial length
- Common design for small European mass produced pumps
- Common to household water pumps, Jacuzzis, fountain pumps and dishwashers



Standard Materials of Construction:

• Faces:

- Carbon, Phenolic Carbon, Silicon Carbide, Tungsten Carbide

• Elastomers:

- Buna, Viton®, Aflas®, Neoprene, EPDM

• Metallurgy:

- 304



Operating Limits:

- Pressure: to 85 PSI (6 Bar).
- Temperature: -4°F to +350°F. (- 20 to 180°C)

Apex
sealing,inc.

Apex Sealing Inc.
164 B Yankee Park Rd.
Fairfax, VT 05454
888 .730 .2739
apexsealing.com