


SAN 7

Sanitary Outside Seal

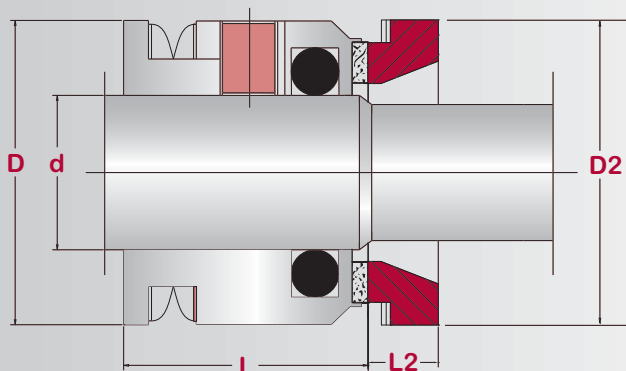

METRIC

INCHES

d	D	D2	L	L2	d	D	D2	L	L2
18	29.0	33.0	19.1	7.0	0.750	1.142	1.299	0.752	0.276
20	32.0	35.0	19.1	10.0					
22	35.0	37.0	19.1	10.0	0.875	1.378	1.457	0.752	0.394
24	37.0	39.0	19.1	10.0					
25	41.0	40.0	19.1	10.0	1.000	1.614	1.575	0.752	0.394
28	41.0	43.0	19.1	10.0	1.125	1.614	1.693	0.752	0.394
30	47.0	45.0	19.1	10.0					
32	47.0	48.0	19.1	10.0	1.250	1.850	1.890	0.752	0.394
33	48.0	48.0	19.1	10.0					
35	49.0	50.0	19.1	10.0	1.375	1.929	1.969	0.752	0.394
38	53.0	56.0	21.1	13.0	1.500	2.087	2.205	0.831	0.512
40	55.0	58.0	21.1	13.0	1.625	2.165	2.283	0.831	0.512
43	60.0	61.0	21.1	13.0					
45	60.0	63.0	21.1	13.0	1.750	2.362	2.480	0.831	0.512
48	65.0	66.0	21.1	13.0	1.875	2.559	2.598	0.831	0.512
50	65.0	70.0	21.1	14.0	2.000	2.559	2.756	0.831	0.551
53	74.0	73.0	22.1	14.0	2.125	2.913	2.874	0.870	0.551
55	74.0	75.0	22.1	14.0	2.250	2.913	2.953	0.870	0.551
60	79.0	80.0	25.8	14.0	2.375	3.110	3.150	1.016	0.551
63	87.0	83.0	25.8	14.0	2.500	3.425	3.268	1.016	0.551
65	87.0	85.0	25.8	14.0	2.625	3.425	3.346	1.016	0.551
70	93.0	92.0	25.8	16.0	2.750	3.661	3.622	1.016	0.630
75	98.0	97.0	25.8	16.0	3.000	3.858	3.819	1.016	0.630



Features and Benefits:

- Wave spring design
- Easy wash down for sanitary applications
- Quick installation
- Rugged Inserted seal face
- Tapered ID stationaries available for wash down access
- FDA approved materials available
- Compact size for tight seal areas

Standard Materials of Construction:

Faces:

- Carbon Graphite (Resin Impregnated), Silicon Carbide

Elastomers:

- Buna, Viton®, Aflas®, Neoprene, EPDM, Kalrez®, Chemraz®

Metallurgy:

- 304, 316, Monel, Hastelloy C ®, Alloy 20

Operating Limits:

- Pressure: to 150 PSI.
- Temperature: -40°F to +400°F.

Apex
sealing,inc.

Apex Sealing Inc.
164 B Yankee Park Rd.
Fairfax, VT 05454
888 .730 .2739
apexsealing.com